



INKJET COLORED BODY RECTIFIED FLOOR & WALL GLAZED PORCELAIN STONEWARE

TENDER GREY



GICS1224TG
12" x 24"
Field Tile




GICS1836TGM
18" x 36" Rectified Field Tile
GICS1836TGRP
18" x 36" Rectified Grip Field Tile



GICS636TGM
6" x 36" Rectified Field Tile
GICS636TGRP
6" x 36" Rectified Grip Field Tile



GICS612CBTG
6" x 12"
Cove Base



GICSMOSTG
2" x 2" Mosaic




GICS324BNTG
3" x 24"
Bullnose

STERLING GREY



GICS1224SG
12" x 24"
Field Tile



GICS1836SGM
18" x 36" Rectified Field Tile
GICS1836SGRP
18" x 36" Rectified Grip Field Tile



GICS636SGM
6" x 36" Rectified Field Tile
GICS636SGRP
6" x 36" Rectified Grip Field Tile



GICS612CBSG
6" x 12"
Cove Base



GICSMOSSG
2" x 2" Mosaic



GICS324BNSG
3" x 24"
Bullnose

ANTHRACITE



GICS1224AN
12" x 24"
Field Tile




GICS1836ANM
18" x 36" Rectified Field Tile
GICS1836ANRP
18" x 36" Rectified Grip Field Tile



GICS636ANM
6" x 36" Rectified Field Tile
GICS636ANRP
6" x 36" Rectified Grip Field Tile



GICS612CBAN
6" x 12"
Cove Base



GICSMOSAN
2" x 2" Mosaic




GICS324BANAN
3" x 24"
Bullnose

SILVER



GICS1224SI
12" x 24"
Field Tile



GICS1836SIM
18" x 36" Rectified Field Tile
GICS1836SIRP
18" x 36" Rectified Grip Field Tile



GICS636SIM
6" x 36" Rectified Field Tile
GICS636SIRP
6" x 36" Rectified Grip Field Tile




GICS612CBSI
6" x 12"
Cove Base



GICSMOSSI
2" x 2" Mosaic




GICS324BNSI
3" x 24"
Bullnose

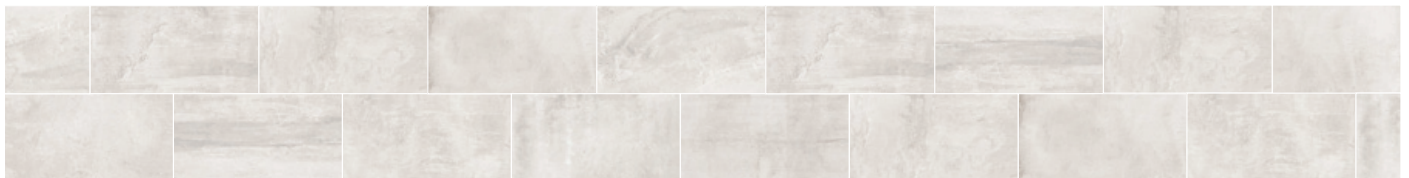

PACKAGING						
NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
12" x 24" Field Tile	8	15.751	56.07	32	504.032	1836
18" x 36" Rectified Field Tile	5	22.189	80.54	18	399.402	1488
6" x 36" Rectified Field Tile	7	10.21	38.22	36	367.56	1376
3" x 24" Bullnose	16	-	-	-	-	-
2" x 2" Mosaic	5	-	-	-	-	-
6" x 12" Cove Base	8	-	-	-	-	-

TECHNICAL SPECIFICATIONS		
DESCRIPTION	RESULT	TEST METHOD (STANDARD)
PEI Rating	4	C1027 Test
Water Absorption	0.05%	C373 Test
C.O.F. (Dynamic)	0.42 (0.76 Grip)	ANSI 137.1
Frost Resistance	RESISTANT	ASTM C1026
Breaking Strength	≥ 250 lbs.	ASTM C648
Thickness	8 mm	Factory Provided

SHADE VARIATION AND APPLICATIONS			
V2	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
 MODERATE VARIATION	Floor	•	•
	Wall	•	•
	Countertop	•	•