




Featuring Crema, Grey 18x18

crema

## INKJET FLOOR & WALL GLAZED PORCELAIN STONEWARE


### GREY




**GICR1212GR**  
12" x 12"  
Field Tile



**GICR1818GR**  
18" x 18"  
Field Tile

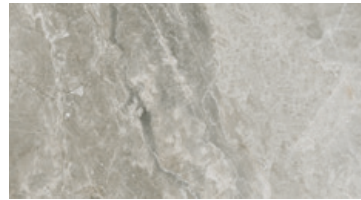

**GICR1224GR**  
12" x 24"  
Field Tile




**GICRMOSGR**  
12" x 12"  
Mosaic



**GICR312GR**  
3" x 12"  
Bullnose


### BIANCO




**GICR1212BI**  
12" x 12"  
Field Tile



**GICR1818BI**  
18" x 18"  
Field Tile

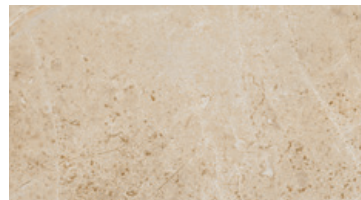

**GICR1224BI**  
12" x 24"  
Field Tile



**GICRMOSBI**  
12" x 12"  
Mosaic



**GICR312BI**  
3" x 12"  
Bullnose

### BEIGE




**GICR1212BG**  
12" x 12"  
Field Tile



**GICR1818BG**  
18" x 18"  
Field Tile



**GICR1224BG**  
12" x 24"  
Field Tile



**GICRMOSBG**  
12" x 12"  
Mosaic



**GICR312BG**  
3" x 12"  
Bullnose

### PACKAGING

NOMINAL SIZE	PIECES PER BOX	SQ. FT. PER BOX	LBS. PER BOX	BOXES PER PALLET	SQ. FT. PER PALLET	WEIGHT PER PALLET
12" x 24" Field Tile	7	13.89	64.59	32	444.3	2067.05
18" x 18" Field Tile	7	15.61	68.34	32	499.4	2186.99
12" x 12" Field Tile	12	11.84	46.07	64	757.8	2948.90
3" x 12" Bullnose	22	3.88	21.82	-	-	-
12" x 12" Mosaic	4	5.70	16.53	90	348.8	-

### TECHNICAL SPECIFICATIONS

DESCRIPTION	RESULT	TEST METHOD (STANDARD)
PEI Rating	5	C1027 Test
Water Absorption	≥ 0.5%	C373 Test
C.O.F. (Wet)	≥ 0.60	ASTM C1028
C.O.F. (Dry)	≥ 0.60	ASTM C1028
Frost Resistance	RESISTANT	ASTM C1026
Breaking Strength	≥ 250 lbs.	ASTMC648

### SHADE VARIATION AND APPLICATIONS

V3 HEAVY VARIATION		RESIDENTIAL	COMMERCIAL	INDUSTRIAL
	Floor	•	•	•
Wall	•	•	•	
Countertop	•	•	•	